



GYDXTW

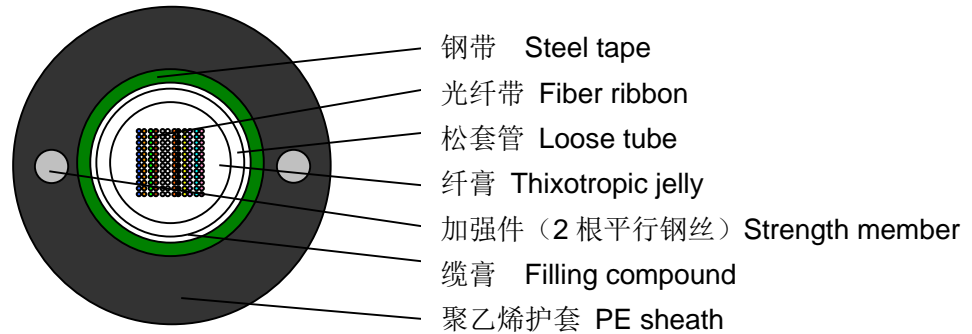

光缆芯数 Fiber count		24~72	84~96	108~120	132~144	~216	~288	~432	~576
光纤带芯数 Fiber number per ribbon		12	12	12	12	12	24	24	24
光缆外径 (mm) Cable diameter approx		13.8	14.8	15.8	16.5	17.7	19.8	21.2	23.2
光缆重量 (Kg/km) Weight approx		197	223	251	269	306	377	439	505
拉伸力(N) Tensile strength	长期 long term	600							
	短期 short term	1500~3000							
压扁力(N/100mm) Crush resistance	长期 long term	300							
	短期 short term	1000							
弯曲半径(mm) Bending radius	动态 dynamic	$\geq 20 \times$ 光缆外径 cable diameter							
	静态 static	$\geq 10 \times$ 光缆外径 cable diameter							
适用温度(°C) Operating temperature		-40--- +60							
敷设方式 Application		架空、管道 aerial, duct							

GYDTA/GYDTS

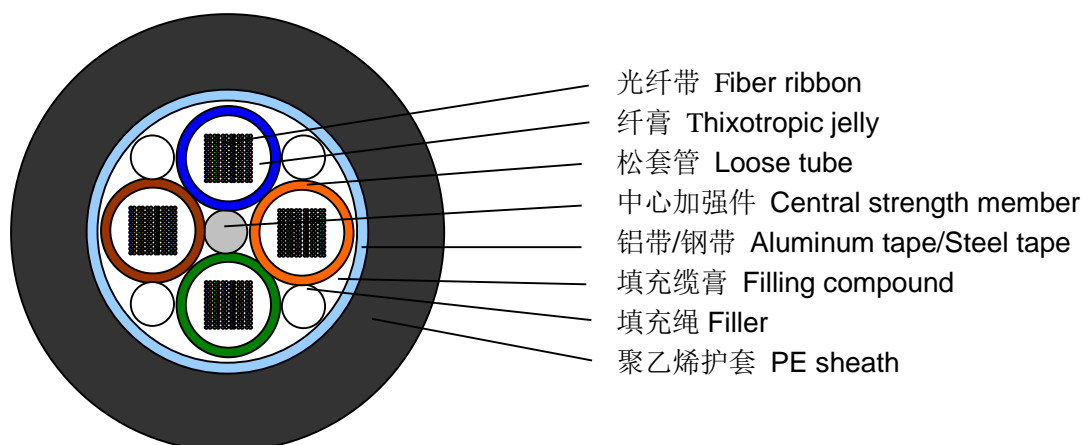

光纤数量 Fiber count		48~60	72~192	216~288	312~360	384~432	456~576
光纤带芯数 Fiber number per ribbon		12	12	12	12	12	12
绞合单元数 Element number		4+4	4+4	4+4	5	6	6
中心加强件/钢丝外径(mm) CSM/steel wire diameter		--/2.2	--/2.3	--/2.5	4.2/2.5	6.0/2.5	7.0/3.96 (Stranded steel wire)
光缆外径 GYDTA/GYDTS(mm) Cable diameter approx		16.9/17.6	17.6/18.3	18.4/19.1	20.1/21.0	21.9/22.8	25.2/25.8
光缆重量 GYDTA/GYDTS (kg/km) Weight approx		267/326	296/356	329/394	383/460	448/532	708/792
拉伸力 (N) Tensile strength	长期 long term	600					
	短期 short term	1500~3000					
压扁力 (N/100mm) Crush resistance	长期 long term	300					
	短期 short term	1000					
弯曲半径 (mm) Bending radius	动态 dynamic	≥20×光缆外径 cable diameter					
	静态 static	≥10×光缆外径 cable diameter					
适用温度 (°C)		-40--- +60					

Operating temperature	
敷設方式 Application	架空、管道 aerial, duct