


蝶形引入光缆

Butterfly Drop Cable(FTTH terminal cable)

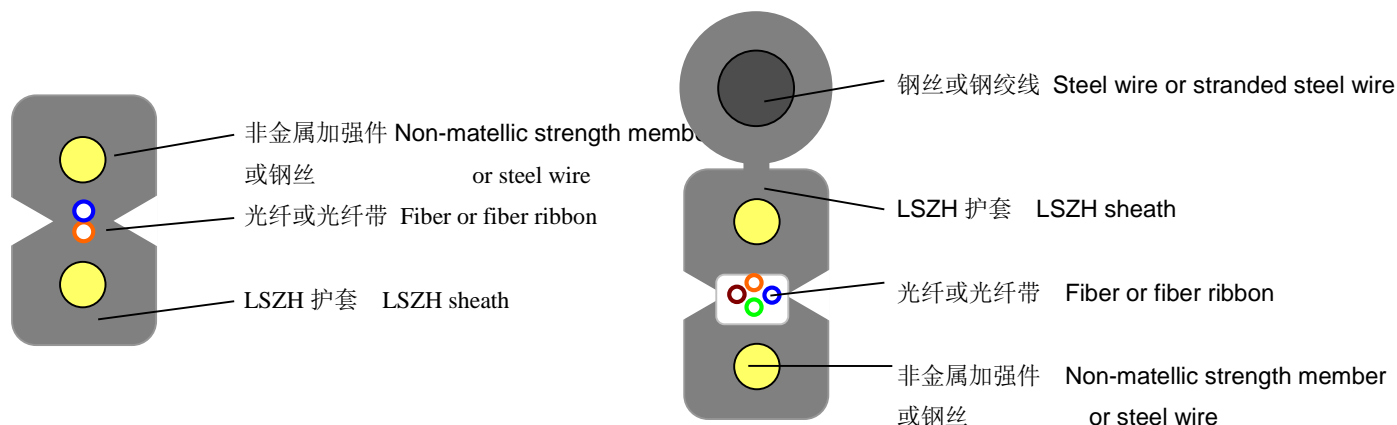


图一 Figure 1
产品技术参数/ Technical parameter:

		蝶形光缆 (图一) Butterfly drop cable(Figure 1)		自承式蝶形光缆 (图二) Self-supporting butterfly drop cable(Figure 2)	
光纤数量 Fiber count		1~2	4	1~2	4
衰减 Attenuation G.652 or G.657 @1310/@1550nm		0.36/0.25	0.36/0.25	0.36/0.25	0.36/0.25
光缆尺寸 Cable diameter (mm)		2.0X3.0(±0.1)	2.0X3.5(±0.1)	2.0X5.3(±0.2)	2.0X5.6(±0.2)
光缆单重 Cable Weight (kg/km)		11	13	22	24
抗拉力 Tensile strength (N)	长期 long term	100 (金属加强件 metallic strength member) 40 (非金属加强件 Non-metallic strength member)		300	
	短期 short term	200 (金属加强件 metallic strength member) 80 (非金属加强件 Non-metallic strength member)		600	
压扁 (N/100mm)	长期 long term	1000 (金属加强件 metallic strength member) 500 (非金属加强件 Non-metallic strength member)		1000	
	短期 short term	2200 (金属加强件 metallic strength member) 1000 (非金属加强件 Non-metallic strength member)		2200	
最小弯曲半径 Bending radius (mm)	静态 Static	30 (G.652)	15 (G.657A)	10 (G.657B)	
	动态 Dynamic	60 (G.652)	30 (G.657A)	25 (G.657B)	

光缆使用温度范围 Operating temperature (°C)	-40~+60
环保标准 Environmental standards:	符合欧盟 ROHS 标准，阻燃等级满足 IEC60332。 accord with EU ROHS standard. flame retardant grade accord with IEC60332.

蝶形引入光缆

Butterfly Drop Cable(FTTH terminal cable)

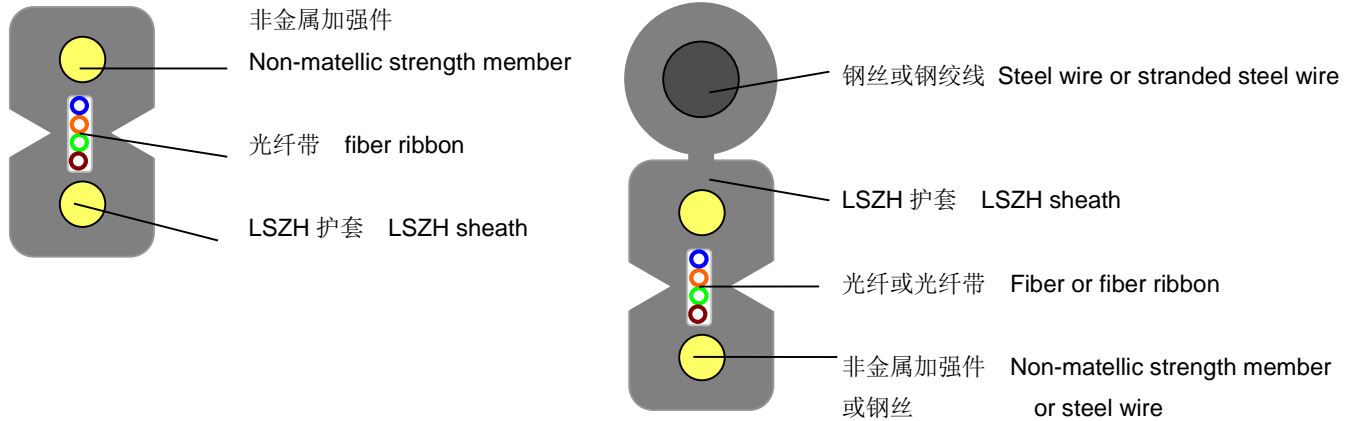


图四 Figure 4

产品技术参数/ Technical parameter:


		蝶形光缆 (图三) Butterfly drop cable(Figure 1)		自承式蝶形光缆 (图四) Self-supporting butterfly drop cable(Figure 2)	
光纤数量 Fiber count		4 (光纤带 Fiber ribbon)		4 (光纤带 Fiber ribbon)	12 (光纤带 Fiber ribbon)
衰减 Attenuation G.652 or G.657 @1310/@1550nm		0.36/0.25		0.36/0.25	0.36/0.25
光缆尺寸 Cable diameter (mm)		2.0X4.0(±0.1)		2.0X6.0(±0.2)	2.0X8.5(±0.2)
光缆单重 Cable Weight (kg/km)		12		25	28
抗拉力 Tensile strength (N)	长期 long term	非金属加强件 Non-metallic strength member	40	300	
	短期 short term		80	600	
压扁 (N/100mm)	长期 long term	500		1000	
	短期 short term	1000		2200	
最小弯曲半径 Bending radius (mm)	静态 Static	30 (G.652)	15 (G.657A)		10 (G.657B)
	动态 Dynamic	60 (G.652)	30 (G.657A)		25 (G.657B)
光缆使用温度范围 Operating temperature (°C)		-40~+60			
环保标准 Environmental standards:		符合欧盟 ROHS 标准, 阻燃等级满足 IEC60332。 accord with EU ROSH standard. flame retardant grade accord with IEC60332.			

管道蝶形引入光缆

Duct Butterfly Drop Cable

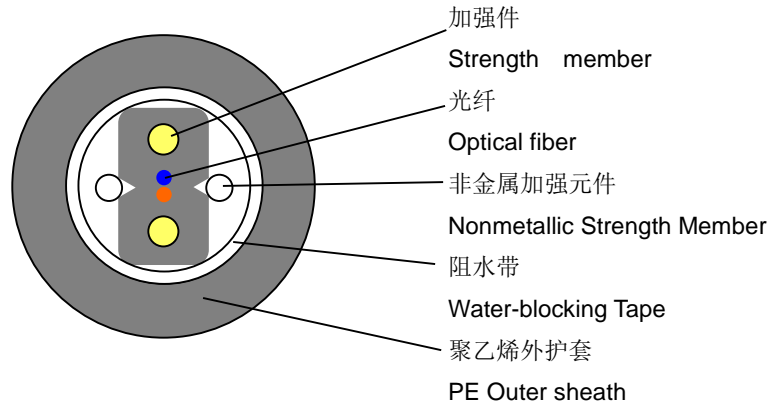

光缆型号 Cable Type	光缆直径 Cable Diameter (mm)	光缆重量 Cable Weight (kg/km)	允许拉伸力 Tensile Strength 长期/短期 Long/Short Term(N)	允许压扁力 Crush Resistance 长期/短期 Long/Short Term(N)	储存/使用温度 Storage/Operating Temperature(°C)
GJYXFHY	7.8	43	300/600	300/1000	-20~+60

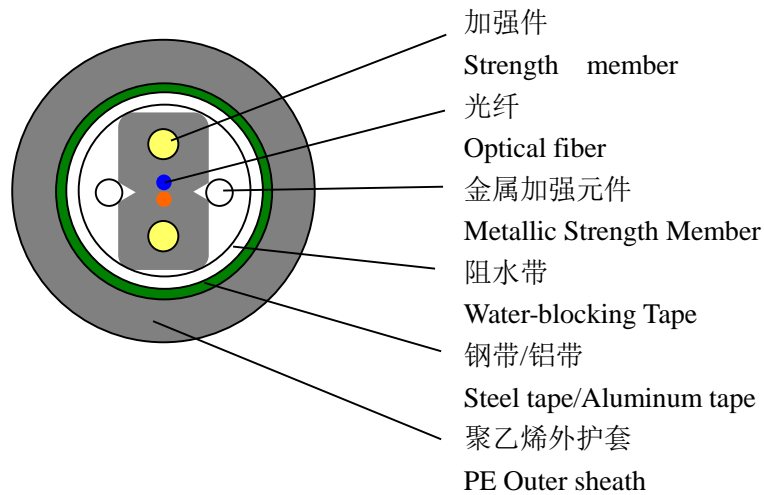

光缆型号 Cable Type	光缆直径 Cable Diameter (mm)	光缆重量 Cable Weight (kg/km)	允许拉伸力 Tensile Strength 长期/短期 Long/Short Term(N)	允许压扁力 Crush Resistance 长期/短期 Long/Short Term(N)	储存/使用温度 Storage/Operating Temperature(°C)
GJYXHS	8.0	77	600/1500	300/1000	-20~+60
GJYXHA	7.9	61	600/1500	300/1000	-20~+60