



GYXTW

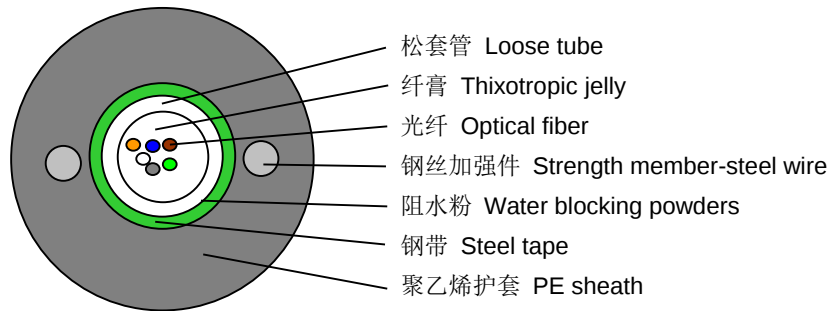


光缆芯数 Fiber count		2~12	14~24
中心束管管径 (mm) Tube diameter		Φ2.5	Φ3.2
钢丝外径 (mm) steel wire diameter		Φ1.0	Φ1.0
光缆外径 (mm) Cable diameter		Φ7.6	Φ8.5
光缆单重 (Kg/km) Weight		67	81
抗拉伸力 (N) Tensile strength	长期 long term	600	
	短期 short term	1500	
抗 压 扁 力 (N/100mm) Crush resistance	长期 long term	300	
	短期 short term	1000	
弯曲半径(mm) Bending radius	动态 dynamic	≥20×光缆外径 cable diameter	
	静态 static	≥10×光缆外径 cable diameter	
适用温度(°C) Operating temperature		-40 --- +60	
敷设方式 Application		架空、管道 aerial, duct	

GYXTY

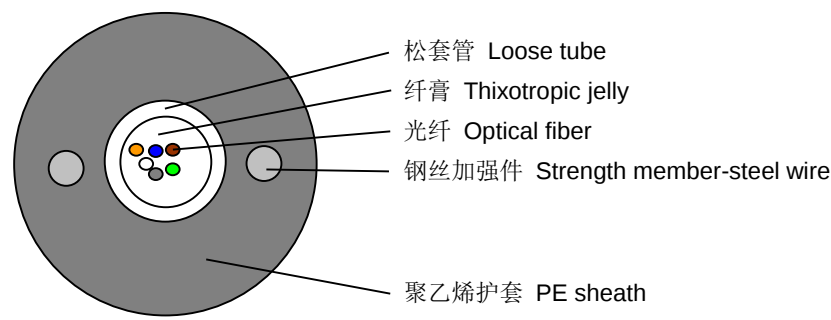


光缆芯数 Fiber count		2~12	14~24
中心束管管径 (mm) Tube diameter		Φ2.5	Φ3.2
钢丝外径 (mm) steel wire diameter		Φ1.0	Φ1.0
光缆外径 (mm) Cable diameter		Φ6.9	Φ7.8
光缆单重 (Kg/km) Weight		48	59
抗拉伸力 (N) Tensile strength	长期 long term	500	500
	短期 short term	1000	1000
抗 压 扁 力 (N/100mm) Crush resistance	长期 long term	300	300
	短期 short term	1000	1000
弯曲半径(mm) Bending radius	动态 dynamic	≥20×光缆外径 cable diameter	
	静态 static	≥10×光缆外径 cable diameter	
适用温度(°C) Operating temperature		-40 --- +60	
敷设方式 Application		架空、管道 aerial, duct	


GYXTY

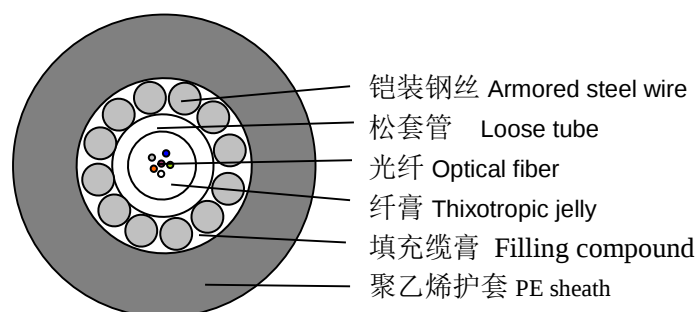

GYXTS

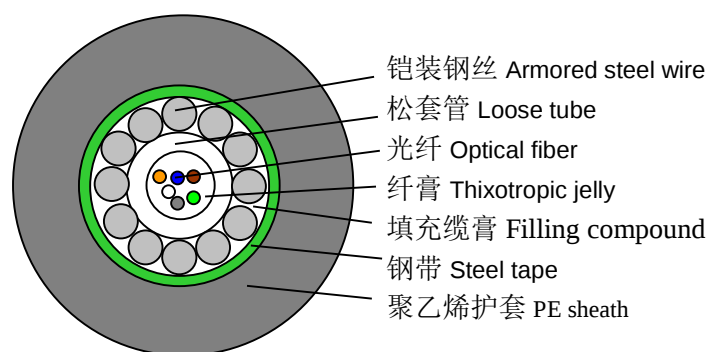

GYXTA

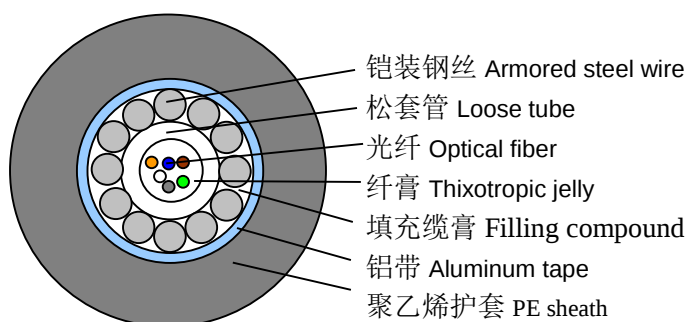

光缆芯数 Fiber count		2~12	14~24
束管管径(mm) Tube diameter		Φ2.2	Φ3.2
钢丝外径 (mm)/数量 Steel wire diameter/number		Φ0.7/12	Φ0.7/17
每管最大芯数 Max. cores in tube		12	24
光缆外径 (mm) Cable diameter	GYXTY	Φ7.5	Φ8.5
	GYXTS	Φ8.5	Φ9.5
	GYXTA	Φ8.5	Φ9.5
光缆重量 (Kg/km) Cable weight	GYXTY	77	105
	GYXTS	104	136
	GYXTA	91	120
拉伸力 (N) Tensile strength	长期 long term	600	
	短期 short term	1500	
压扁力 (N/100mm) Crush Resistance	长期 long term	300	
	短期 long term	1000	
弯曲半径 (mm) Bending Radius	动态 dynamic	≥20×光缆外径 cable diameter	
	静态 static	≥10×光缆外径 cable diameter	
适用温度(°C) Operating temperature		-40 --- +60	
敷设方式 Application	GYXTY	架空、管道 Aerial, duct	
	GYXTS	架空、管道、直埋 Aerial, duct, direct burial	
	GYXTA	架空、管道、直埋 Aerial, duct, direct burial	