


>>>

水线光缆GYTA333(GYTS333)

Underwater Cable GYTS333(GYTS333)

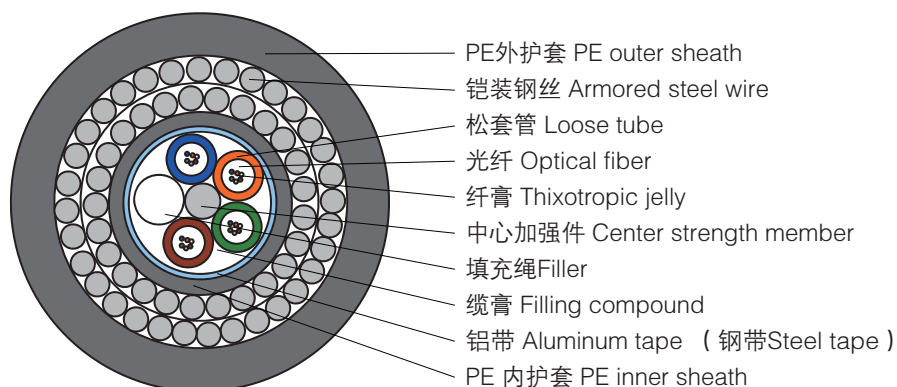

光纤数量 Fiber count		2~30	32~36	38~60	62~72
绞合单元数 Element number		5	6	5	6
每管最大芯数 Max. cores in tube		6	6	12	12
内护外径 Diameter of inner sheath		8.3	8.8	9.1	9.7
钢丝规格/数量 Steel wire diameter and No.		Φ1.0/28+34	Φ1.0/29+35	Φ1.0/30+36	Φ1.0/32+38
光缆外径 Cable diameter approx.		16.7	17.2	17.5	18.1
光缆重量 Weight approx. (kg/km)		543	568	590	635
拉伸力 Tensile strength (N)	长期 Long term	10000			
	短期 Short term	20000			
压扁力 Crush Resistance (N/100mm)	长期 Long term	3000			
	短期 Short term	5000			
弯曲半径 Bending Radius (mm)	静态 Static	≥ 15 × 光缆外径 cable diameter			
	动态 Dynamic	≥ 30 × 光缆外径 cable diameter			
适用温度 Operating Temperature (°C)		-40 --- +60			
敷设方式 Application		水下 Under water			