

用途 Application:

- 应用于胸罩内衣 Used in brassieres

表面状态 Surface coating:

- 光面 Bright
- 镀锌 Galvanized


特点 Characteristics:

- 易加工，直径公差小 Good formability, small tolerance
- 表面光亮，耐腐蚀 Shiny surface, good corrosion prevention

包装方式 Packing types:


- 工字轮 Spool
- 脱件 Coil

胸罩钢丝 STEEL WIRES FOR BRA



使用注意事项 Remarks during use and handling:

- 运输过程中应轻提轻放，防止撞击损坏钢丝，防潮并严禁淋雨，钢丝应储存在干燥通风的室内
During transportation, handle with care, avoid bumping and damaging the steel wires. Moisture and rain prohibited. Steel wires must be stored in dry and well ventilated indoors.
- 使用时应注意钢丝放线方向，并注意放线张力的一致性
Pay attention to the direction of steel wires when paying-off. Be sure the spool or coil is rotating freely as to achieve identical tension of all the steel wires.
- 如多次使用，剩余钢丝必须及时重新包裹，防止钢丝表面氧化变质
In case of batch usage, the remaining should be repacked to avoid oxidizing of the surface.

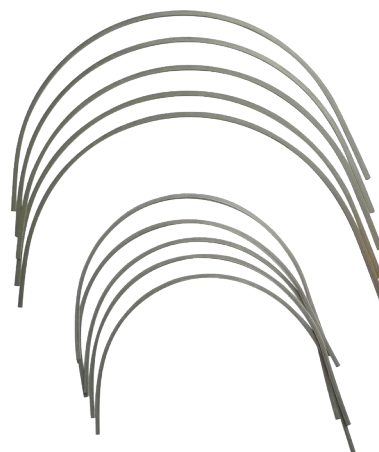

公称直径 Nominal diam. mm	允许偏差 Tolerance mm	公称抗拉强度 Nominal tensile strength MPa	执行标准 Standard
0.7	±0.01	1700~2010	根据客户的技术要求生产 In accordance with customers' requests
0.8	±0.01	1700~2010	
0.9	±0.01	1700~2010	
1.0	±0.01	1600~1960	
1.2	±0.01	1600~1960	
1.4	±0.01	1600~1960	
1.6	±0.01	1600~1960	
1.8	±0.01	1600~1960	